



## Portable Power Station Generator 300W To 1000W UL Li-Ion Home Backup Battery With Solar Panel LCD Display

Our Product Introduction

for more products please visit us on [evstationcharger.com](http://evstationcharger.com)

### Basic Information

- Place of Origin: China
- Brand Name: MINKO
- Certification: CE, ROHS
- Model Number: Portable Power Station-M1000
- Minimum Order Quantity: 5 pieces
- Price: negotiation
- Packaging Details: L210xW85xH52 (mm)
- Delivery Time: 8 -10 working days
- Payment Terms: T/T, Western Union, MoneyGram, Paypal, Skrill, Transferwise
- Supply Ability: 1000000 pieces per month



### Product Specification

- Rated Power AC: 1000W
- Capacity: 999Wh
- Power Indicate: LCD Display
- Solar Charging Input: 18-23V/3A(60W Max)
- Wireless Charge Output: 10W
- Discharging Temperature Range: 14~104 (-10~40 )
- Housing Material: ABS+PC
- Operation Humidity: 10%~90%
- Highlight: Rechargeable Portable Power Station 1000w, Rechargeable Portable Power Station 300w, 1500w portable battery power station



### More Images



## Product Description

### Portable Power Station Generator 300W to 1000W UL Li-ion Home Backup Battery With Solar Panel LCD Display

#### Features of Portable Power Station

UL certified vehicle level lithium battery  
 super inverter technology maximum support 1500W equipment (US standard Japanese standard 120V) and maximum support 2000W equipment (Central Europe Australian-British South African standard 230V)  
 1000W rated output  
 full large capacity 1 KWH electricity  
 modeling IP armor warrior  
 compared to this product size Mini weight light

**Apply to:** Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook, camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing, environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

#### Product Specification

|                               |                                                                                                                                                                                                                                                                                                            |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Power AC                | 1000W                                                                                                                                                                                                                                                                                                      |
| Capacity                      | 999Wh (22.2V/45A or 3.7V/270000mAh)                                                                                                                                                                                                                                                                        |
| Battery type                  | UL Li-ion                                                                                                                                                                                                                                                                                                  |
| Power Indicate                | LCD display                                                                                                                                                                                                                                                                                                |
| LCD Display                   | Battery remaining capacity, Battery fault, total output power, Over temperature, input power                                                                                                                                                                                                               |
| DC Input                      | DC24V/6.25A(150W max, adapter with UL, CCC, CE, PSE, FCC)                                                                                                                                                                                                                                                  |
| DC fully Charging Time        | About 7 8H                                                                                                                                                                                                                                                                                                 |
| Solar Controller Model        | MPPT                                                                                                                                                                                                                                                                                                       |
| Solar Charging Input          | 18-23V/3A(60W max)                                                                                                                                                                                                                                                                                         |
| Charging Temperature Range    | 32~104 (0 ~40 )                                                                                                                                                                                                                                                                                            |
| USB Output                    | Type-C output: PD 60W(5V3A, 9V3A, 12V3A, 15V3A, 20V3A)*1<br>USB-A output: QC3.0(18W/5V3A, 9V2A, 12V1.5A)*3(total 54W )                                                                                                                                                                                     |
| Wireless Charge Output        | 10W                                                                                                                                                                                                                                                                                                        |
| Cigarret Lighter output       | 12V/10A(120W)                                                                                                                                                                                                                                                                                              |
| DC output                     | 12V/5A/DC5521*2(total 120W)                                                                                                                                                                                                                                                                                |
| LED light                     | 5W*2(total 10W Max)<br>SOS, flashlight                                                                                                                                                                                                                                                                     |
| AC Output                     | Output waveform: pure sinewave<br>Output voltage: 110V(US/JP) or 220V(EU/UK/AU/CN) (AC output voltage and frequency are customized, according to different countries and regions. Please refer to the actual product)<br>Output frequency: 50/60Hz<br>Peak AC output: 2000W<br>AC continuous output: 1000W |
| Discharging Temperature Range | 14~104 (-10~40 )                                                                                                                                                                                                                                                                                           |
| Product size/Weight           | 328*221*263mm/about 8.9Kg                                                                                                                                                                                                                                                                                  |
| Carton Size/Weight            | 32.5*25*36.5CM/about 11.3Kg/1PCS                                                                                                                                                                                                                                                                           |
| Protections                   | over-charging, short-circuit, low-voltage, over-temperature and over-discharging protection                                                                                                                                                                                                                |
| Color                         | Oranger+gray, Blue+gray, Red+gray, Green+gray                                                                                                                                                                                                                                                              |
| Housing Material              | ABS+PC ( fireproofing V0)                                                                                                                                                                                                                                                                                  |
| Working Temperature           | -15~45                                                                                                                                                                                                                                                                                                     |
| Operation Humidity            | 10%~90%                                                                                                                                                                                                                                                                                                    |
| Standard Package Include      | 1*M1000 portable power supply, 1*150W power supply, 1*User Manual, ,color box packaging, 1*MC4 charging cable, 1*vehicle charging cable, 1*straps                                                                                                                                                          |
| Warranty                      | 12 months                                                                                                                                                                                                                                                                                                  |

#### 9 Protections Strictly Abide By Charging Safety

Overcurrent protection  
 Short-circuit protection  
 Over discharge protection  
 Low temperature protection  
 High temperature protection  
 Overvoltage protection  
 Overload protection  
 Signal interference protection  
 Overcharge protection

# THREE CHARGING METHODS

## Meet the needs of different scenarios

There are three charging methods of AC/Solar/Car charger to meet the requirements of a variety of equipment.



Wall Charger  
700W Max



Solar Charger  
400W Max



Car Charger  
12V

AC full charged  
within **1.5~2.5**  
**Hours**




## Equipped with Uninterruptible Power Supply (UPS)

with UPS function, protect equipment from damage

In UPS mode, when the AC input power of the mains is cut off due to a power outages, the AC input power of the mains can be used in about automatic switch to the product battery within 10 ms to ensure AC output



# Function Panel

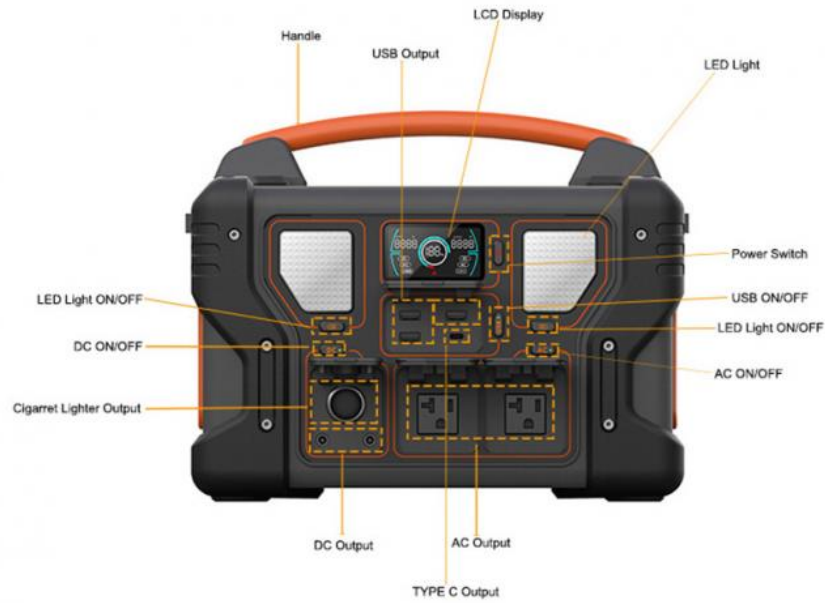



## More use scenarios



**MINKO (SZ) TECHNOLOGY CO., LIMITED**



+8613539872669



yumiko@szminko.com



evstationcharger.com

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ